


Cat.6 U/UTP PVC 4x2x0,51

Application

This data cable range is designed for analogue and digital signal transmission in audio, video and data applications in data communication systems supporting 250 MHz, 1 Gbit/s 1 Gigabit Ethernet.

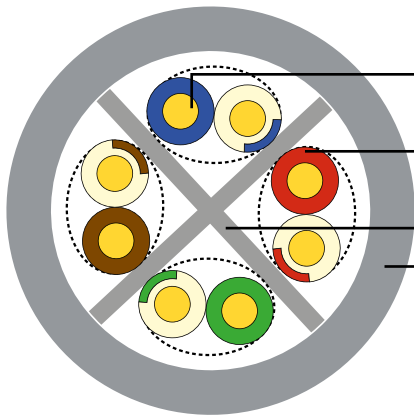

Cable structure

- **Conductive core:**
0,51 mm copper soft wire
- **Insulation:** HDPE polyethylene, colored marking of insulation
- **Cross divider**
- **Outer shell:** PVC RAL 7001 Grey

Standards

ISO/IEC 11801-1,
IEC 61156-5 EN 50288-6-1
ANSI EIA/TIA 568.2-D



