

WMF Single Section Wall Mounted Cabinet



Standard

Comply with ANSI/EIA RS-310-D, DIN41497 part 1, IEC297-2, DIN41494 part 7, GBIT3047.2-92 standard.

Feature

19 inch standard;

Removable Side Panels, side locks **are** optional;

Knock-off hole for entering cable on both top cover, bottom panel and rear panel

Turning angle of front door is over 180 degrees

Easy mounting installation

Unassembled package saving shipping space

fans, shelf **and** PDU are optional

Loading Capacity

60KG

Degree of Protection

IP20

Material


SPCC Cold Rolled Steel

Thickness: **1.5mm**-1.2mm-0.8mm


Surface Finish:

Powder coating

Cabinet details



Fan exhaust hole




Bottom




Removable side panels
(Side lock optional)



Cable entrance on rear panel




Front tempered glass door
with metal perforated border




Zinc plated mounting profile
with U mark
(Ground wire **is** optional)


WMF Single Section Wall Mounted Cabinet

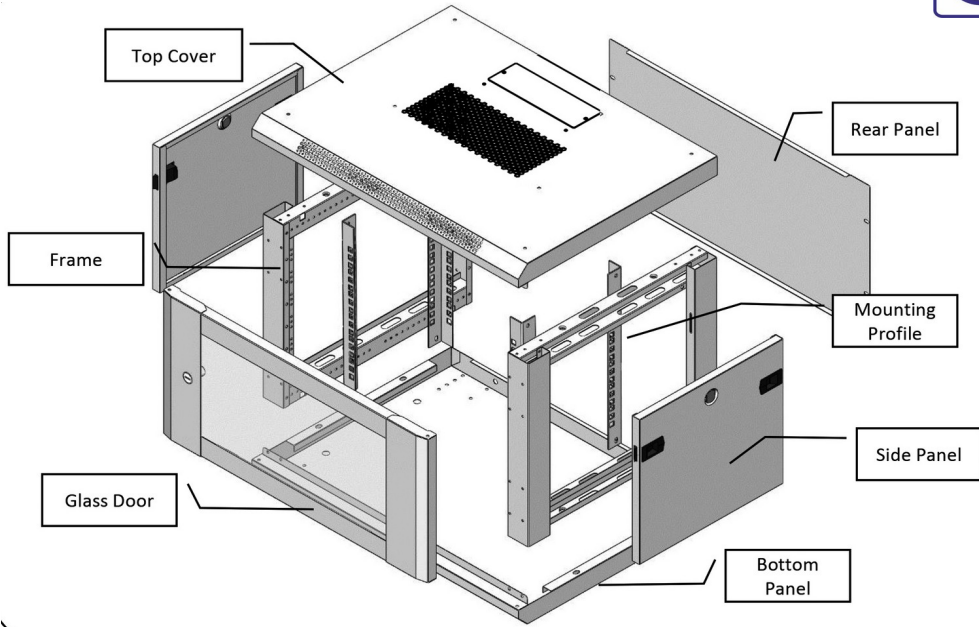


Main dimension 9U 600*450*501mm

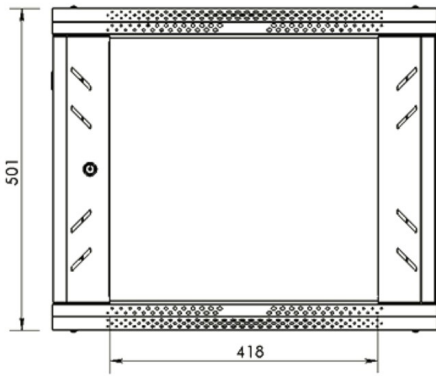


Front view
(Toughened glass)

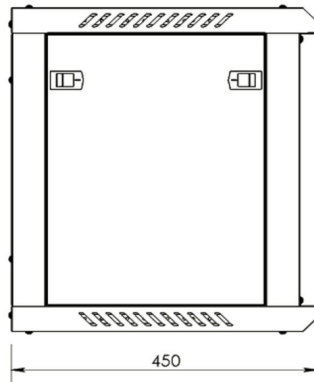


Side view

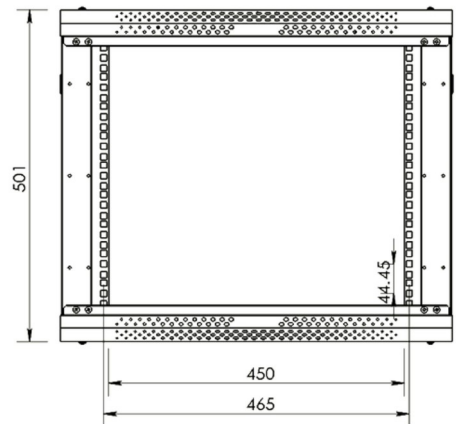


Inside view

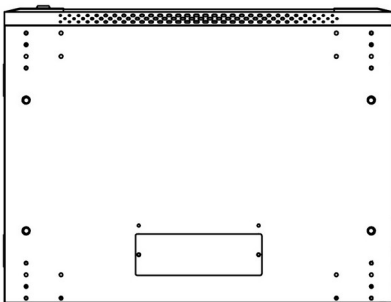

bottom

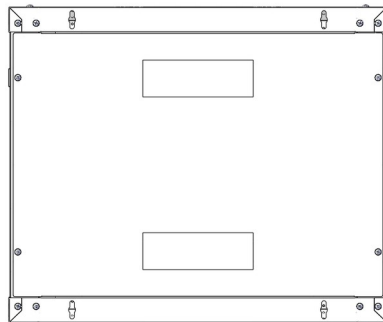

Back view

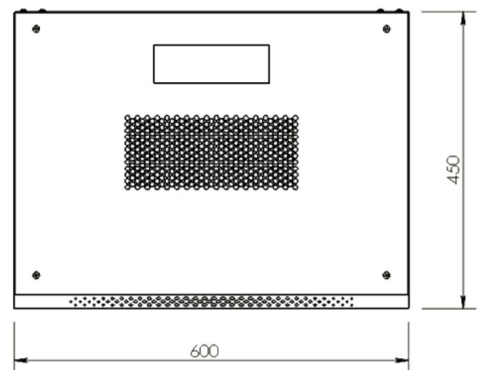

Top view

WMF Single Section Wall Mounted Cabinet



Main Parts

S/N	Specification	Quantity	Unit	Material	Surface Finish	Remark
1	Mounting profile	4	Piece	Coated Zinc plate t1.5	Coated Zinc	with U mark
2	Frame	2	Piece	SPCC cold rolled steel t1.2	Powder coated	
3	Side panel	2	Piece	SPCC cold rolled steel t0.8	Powder coated	
4	Top cover	1	Piece	SPCC cold rolled steel t0.8	Powder coated	
5	Bottom panel	1	Piece	SPCC cold rolled steel t0.8	Powder coated	
6	Rear panel	1	Piece	SPCC cold rolled steel t0.8	Powder coated	
7	Front door	1	Piece	5MM toughened glass door/SPCC t1.0	Powder coated	
8	Lock	1	Piece	Steel	Color Zinc	with 2 keys
9	M6 Square nut	12	Piece	Steel	Color Zinc	
10	M6 B-head screw	12	Piece	Steel	Color Zinc	
11	Allen wrench	1	Piece	Steel	Color Zinc	

Specification

Model No.	Capacity	Width	Depth	Height	Packing dimension	Volume
	(U)	(mm)	(mm)	(mm)	(mm)	(CBM)
WMF4U	4	600	450	280	635*485*160	0.049
WMF4U-600			600		635*635*230	0.093
WMF6U	6	600	450	368	635*485*160	0.049
WMF6U-600			600		635*635*230	0.093
WMF9U	9	600	450	501	635*485*235	0.072
WMF9U-600			600		635*635*231	0.093
WMF12U	12	600	450	635	665*595*236	0.093
WMF12U-600			600		665*635*231	0.098
WMF15U	15	600	450	769	635*940*98, 802*460*132	0.137
WMF15U-600			600		635*757*236	0.113
WMF18U	18	600	450	901	635*940*98, 935*460*132	0.137
WMF18U-600			600		935*630*236	0.139

Color

RAL9004	RAL7035
black	grey
